



FEATURES

- 15 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 3A
- STANDARD 2.00 X 1.60 X 0.40 INCH PACKAGE
- HIGH EFFICIENCY UP TO 82%
- 4:1 WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- CE MARK MEETS 2006/95/EC,93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

DESCRIPTION

The FDC15 series offer 15 watts of output power from a 2.00 x 1.60 x 0.40 inch package. The FDC15 series have 4:1 wide input voltage of 9~36VDC and 18~75VDC. The FDC15 features 1600VDC of isolation, short-circuit and over-voltage protection.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power			15 Watts, max.
Voltage accuracy			± 1%
Minimum load (Note 6)			See Table
Voltage adjustability			± 10%
Line regulation	LL to HL at Full Load		± 0.2%
Load regulation	Min. load to Full load	Single Dual	± 0.5% ± 1%
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL		± 5%
Ripple and noise	20MHz bandwidth		See table
Temperature coefficient			±0.02% / °C, max.
Transient response recovery time	25% load step change		250µS
Over voltage protection	5VDC output		6.2VDC
Zener diode clamp	12VDC output		15VDC
	15VDC output		18VDC
Over load protection	% of FL at nominal input		150%, max.
Short circuit protection			Hiccup, automatics recovery

GENERAL SPECIFICATIONS

Efficiency			See table
Isolation voltage	Input to Output	1600VDC, min. 1minute	
	Input(Output) to Case	1600VDC, min. 1minute	
Isolation resistance			10 ⁹ ohms, min.
Isolation capacitance			300pF, max.
Switching frequency			270KHz±10%
Approvals and standard			IEC60950-1, UL60950-1, EN60950-1
Case material			Nickel-coated copper
Base material			Non-conductive black plastic
Potting material			Epoxy (UL94-V0)
Dimensions			2.00 X 1.60 X 0.40 Inch (50.8 X 40.6 X 10.2 mm)
Weight			48g (1.69oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	2.041 x 10 ⁶ hrs	
	MIL-HDBK-217F	9.140 x 10 ⁵ hrs	

INPUT SPECIFICATIONS			
Input voltage range	24VDC nominal input		9 ~ 36VDC
	48VDC nominal input		18 ~ 75VDC
Input filter			Pi type
Input surge voltage	24VDC input		50VDC 100mS, max.
	48VDC input		100VDC 100mS, max.
Input reflected ripple current			20mA _{p-p}
Start up time	Nominal input and constant resistive load	Power up	20mS
Remote ON/OFF (Note 7)			
(Positive logic)	DC-DC ON		Open or 3.5V < Vr < 12V
	DC-DC OFF		Short or 0V < Vr < 1.2V
Input current of remote control pin	Nominal input		-0.5mA~+0.5mA
Remote off state input current	Nominal input		20mA

ENVIRONMENTAL SPECIFICATIONS

Operating ambient temperature			-40°C ~ +85°C (with derating)
Maximum case temperature			100°C
Storage temperature range			-55°C ~ +105°C
Thermal impedance (Note 8)	Natural convection		10°C/Watt
	Natural convection with heat-sink		8.24°C/Watt
Thermal shock			MIL-STD-810F
Vibration			MIL-STD-810F
Relative humidity			5% to 95% RH

EMC CHARACTERISTICS

EMI	EN55022		Class A
ESD	EN61000-4-2	Air Contact ± 8KV ± 6KV	Perf. Criteria B
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 9)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 9)	EN61000-4-5	± 1KV	Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A







Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor Load max ⁽⁵⁾
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
FDC15-24S05	9 ~ 36 VDC	5 VDC	210mA	3000mA	75mVp-p	20mA	822mA	80	6800μF
FDC15-24S12	9 ~ 36 VDC	12 VDC	100mA	1250mA	75mVp-p	10mA	801mA	82	890μF
FDC15-24S15	9 ~ 36 VDC	15 VDC	80mA	1000mA	75mVp-p	20mA	801mA	82	570μF
FDC15-24D05	9 ~ 36 VDC	± 5 VDC	± 105mA	± 1500mA	75mVp-p	20mA	822mA	80	± 1700μF
FDC15-24D12	9 ~ 36 VDC	± 12 VDC	± 50mA	± 625mA	75mVp-p	20mA	801mA	82	± 300μF
FDC15-24D15	9 ~ 36 VDC	± 15 VDC	± 40mA	± 500mA	75mVp-p	20mA	801mA	82	± 200μF
FDC15-48S05	18 ~ 75 VDC	5 VDC	210mA	3000mA	75mVp-p	15mA	411mA	80	6800μF
FDC15-48S12	18 ~ 75 VDC	12 VDC	100mA	1250mA	75mVp-p	15mA	401mA	82	890μF
FDC15-48S15	18 ~ 75 VDC	15 VDC	80mA	1000mA	75mVp-p	10mA	401mA	82	570μF
FDC15-48D05	18 ~ 75 VDC	± 5 VDC	± 105mA	± 1500mA	75mVp-p	10mA	411mA	80	± 1700μF
FDC15-48D12	18 ~ 75 VDC	± 12 VDC	± 50mA	± 625mA	75mVp-p	20mA	401mA	82	± 300μF
FDC15-48D15	18 ~ 75 VDC	± 15 VDC	± 40mA	± 500mA	75mVp-p	15mA	401mA	82	± 200μF

Note


- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
- Maximum value at nominal input and full load.
- Typical value at nominal input and no load.
- Typical value at nominal input and full load.
- Test by minimum input and constant resistive load.
- The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
- The CTRL pin voltage is reference to -INPUT.
- Heat-sink is optional and P/N: 7G-0011C-F.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF /100V, ESR 48mΩ.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

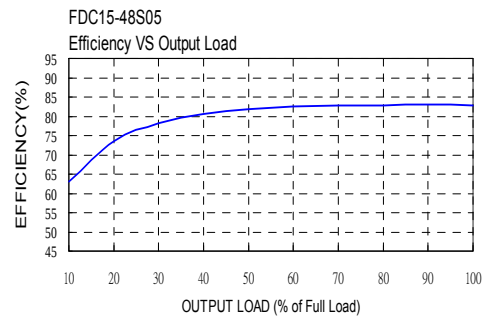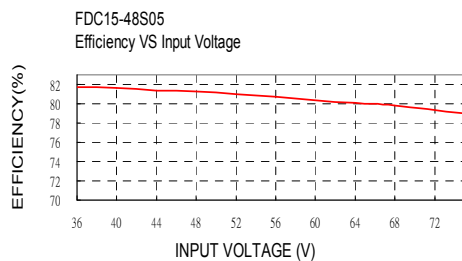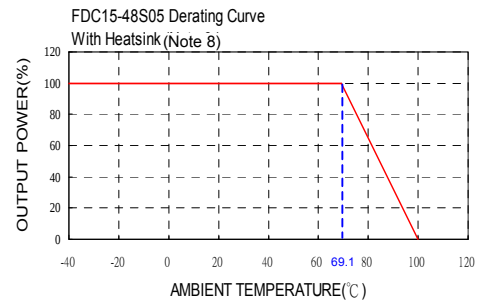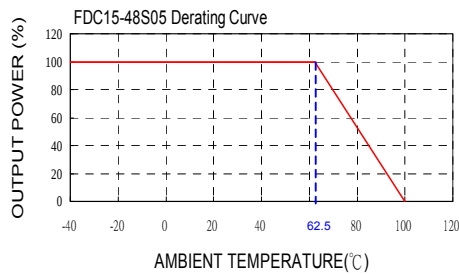



Mechanical Drawing:

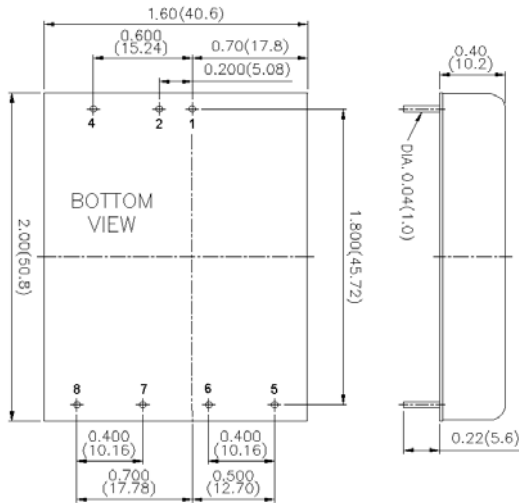


- All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)


PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
4	CTRL	CTRL
5	NO PIN	+ OUTPUT
6	+ OUTPUT	COMMON
7	- OUTPUT	- OUTPUT
8	TRIM	TRIM

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.
() for dual output trim




Recommended EMI Filter:

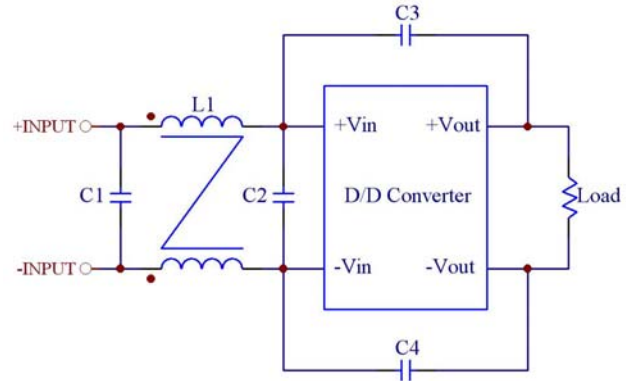

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	L1
FDC15-24xxx	6.8μF/50V 1812 MLCC	N/A	1000pF/2KV MLCC	1000pF/2KV MLCC	450μH Common Choke PMT-048
FDC15-48xxx	2.2μF/100V 1812 MLCC	2.2μF/100V 1812 MLCC	1000pF/2KV MLCC	1000pF/2KV MLCC	450μH Common Choke PMT-048

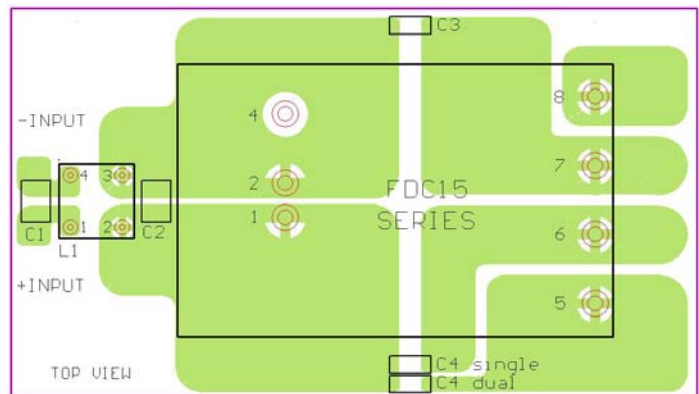

Recommended EN55022 Class B Filter Circuit Layout

