



SUNPOWER TECHNOLOGY CORP.
16F-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
<http://www.sunpower.com.tw>
E-mail: sunpower@sunpower.com.tw

SDS-230C/Dxx Series

230W, Single Output

48V / 96V DC INPUT



198 x 99 x 50 mm
7.8 x 3.9 x 1.97 inch



Features:

- * Inrush current limitation soft start function
- * 2:1 input range, input and output isolation
- * Input polarity reverse protection
- * Input under / over voltage protection
- * Over voltage, over load & short circuit protection
- * Over temperature protection (optional)
- * Remote control ON/OFF (optional)
- * Output voltage $\pm 10\%$ adjustment
- * 100% full load burn-in test
- * Meet LVD standard
- * 2 years warranty

Specification:


INPUT	Model No.	SDS-230Cxx Series			SDS-230Dxx Series		
	Voltage	36 ~ 72V DC (Typical 48V)			72 ~ 144V DC (Typical 96V)		
	Current	<9.5A@36V DC			<5.0A@72V DC		
	Inrush Current	<30A@48V DC			<30A@96V DC		
	Protection	Fuse, 15A/250V			Fuse, 6.3A/250V		
OUTPUT	Voltage	3.3V	5V	7.5V	12V	24V	48V
	Min Load	0A	0A	0A	0A	0A	0A
	Max Load	40A	40A	29.4A	19.2A	9.6A	4.8A
	Output Tolerance ②	±3%	±2%	±2%	±1%	±1%	±1%
	Ripple Noise MAX. ③	70mV	70mV	100mV	120mV	200mV	250mV
	Efficiency (TYP.)	69%	75%	78%	80%	83%	84%
	Output MAX.	132W	200W	220W	230W	230W	230W
PROTECTION	Over Voltage	3.8~4.6V	5.8~7.0V	8.6~10.5V	13.8~16.8V	27.6~33.6V	55.2~67.2V
		Hiccup and recovers automatically after the fault is removed.					
	OverLoad & ShortCircuit	When power supply over 105%~ 180% max load or short circuit acted, power supply will go into hiccup mode and recover automatically after the fault is removed.					
	Input Voltage	Under voltage protection : <32~35V Over voltage protection : >73~78V			---		
ELEC. CHAR.	Over Temperature	Optional, Over 95℃± 5℃ Shutdown, recovers automatically after fault condition has been removed.					
	Rise time	<50mS					
ENVIRONMENT	Remote Control	Optional, RC+ / RC- : 0~0.7V=POWER ON ; 5~10V=POWER OFF , Sink Current: 3~10mA.					
	Temperature ④	Operating: -10~70℃; De-rating: 50℃ ~70℃ : 2.5%/℃. ; Storage: -20~+85℃					
SAFETY	Humidity	Operating: 20% ~ 90% RH (non condensing); Storage: 10% ~ 95% RH (non condensing)					
	Withstand voltage	I/P-O/P:2.0KVAC, I/P-PE:1.5KVAC 1minute					
EMC	Isolation resistance	I/P-O/P, I/P-PE, > 100MΩ/500VDC at 25℃ / 70% RH					
	EMI	EN 55022 CLASS B, FCC CFR 47 PART 15 CLASS B, CNS 13438 CLASS B.					
OTHERS	EMS	EN 55024 : EN 61000-4-2,3,4,6,8 ; ENV 50204					
	Cooling	Forced airflow cooling with DC fan.					
	M.T.B.F.	229K hours					
	Dimension	198 x 99 x 50 mm (L*W*H)					
NOTE	Packing	N.W.:0.8Kg / 1pc; 20pcs / 1.38 CUFT / 1 CTN					
		① All measurements which not mentioned are based on 48V/96VDC input, output Max at ambient 25℃ / 70%RH					
		② Output tolerance included set up voltage, line regulation and load regulation.					
		③ Ripple & noise are measured at 42~72V/82~144VDC input with 10~50℃ condition and 20MHz of bandwidth by terminated using a 10" ~15" twisted pair-wire with a 0.1uF & a 47uF parallel capacitor.					
		④ The operating temperature shall follow the de-rating curve in spec					
	⑤ The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.						




SUNPOWER TECHNOLOGY CORP.
 16F-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
<http://www.sunpower.com.tw>
 E-mail: sunpower@sunpower.com.tw

SDS-230C/Dxx Series

Block Diagram : DS3

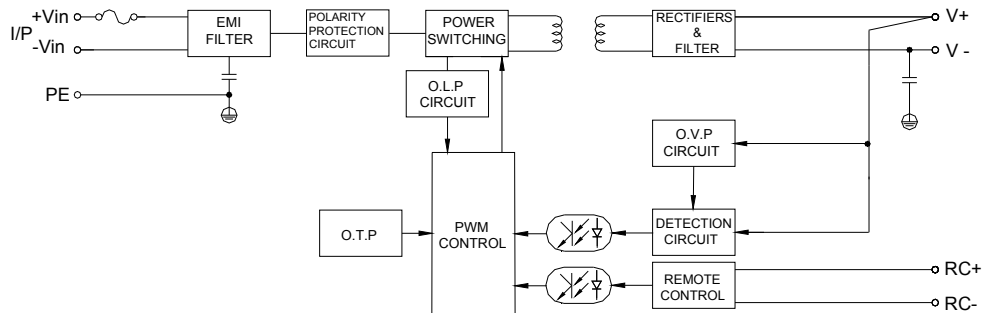


De-rating Curve :

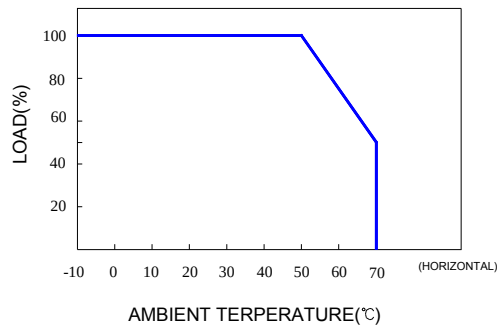

Dimension:

(Unit: mm)

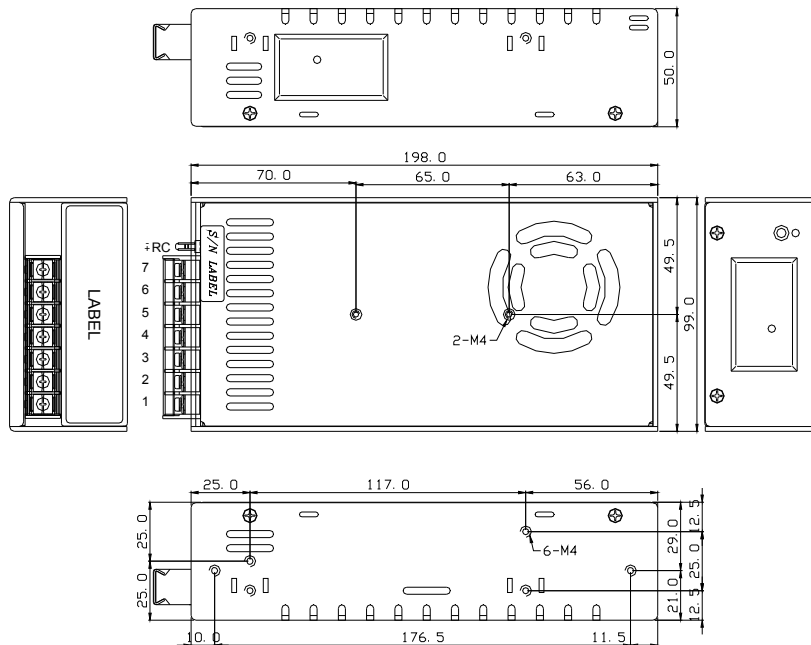

NOTES:

TERMINAL BLOCK: 7P, PITCH 9.5mm WITH PC COVER.

MODEL No.	1	2	3	4	5	6	7
SDS-230C/Dxx	+Vin	-Vin	PE	-V	-V	+V	+V