



APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

FEATURES

- 5 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 84%
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED SHIELD
- FIXED SWITCHING FREQUENCY
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

OPTIONS

SMD TYPE, M1 TYPE, M2 TYPE

DESCRIPTION

The FKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with FKC03 series. FKC05 series have 2:1 wide input voltage of 9~18VDC, 18~36VDC and 36~75VDC. FKC05-W series have 4:1 ultra wide input voltage of 9~36VDC and 18~75VDC.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		5 Watts, max.
Voltage accuracy		± 1%
Minimum load		0%
Line regulation	LL to HL at Full Load	± 0.2%
Load regulation	No Load to Full Load	± 0.5%
	Single Dual	± 1%
Cross regulation(Dual)	Asymmetrical load 25% / 100% FL	± 5%
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µS
Over load protection	% of FL at nominal input	170%
Short circuit protection		Continuous, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output	1600VDC, min. 1minute
	Input (Output) to Case	DIP 1600VDC, min. 1minute
	SMD	1000VDC, min. 1minute
Isolation resistance		10 ⁹ ohms, min.
Isolation capacitance		300pF, max.
Switching frequency		300KHz±10%
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight	DIP	16g (0.55oz)
	SMD	18g (0.62oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	3.165 x 10 ⁶ hrs
	MIL-HDBK-217F	1.631 x 10 ⁶ hrs

INPUT SPECIFICATIONS			
Input voltage range	FKC05	12VDC nominal input	9 ~ 18VDC
		24VDC nominal input	18 ~ 36VDC
	FKC05-W	48VDC nominal input	36 ~ 75VDC
		24VDC nominal input	9 ~ 36VDC
		48VDC nominal input	18 ~ 75VDC
Input filter			Pi type
Input surge voltage		12VDC input	36VDC 100mS, max.
		24VDC input	50VDC 100mS, max.
		48VDC input	100VDC 100mS, max.
Input reflected ripple current			20mA _{p-p}
Start up time	Nominal input and constant resistive load		Power up
			450mS, max.
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature	Standard	-25°C~+85°C (with derating)	
	M1 (Note 6)	-40°C~+85°C (non-derating)	
	M2 (W series)	-40°C~+85°C (with derating)	
Maximum case temperature	Standard	+100°C	
	M1	+105°C	
Storage temperature range		-55°C ~ +105°C	
Thermal impedance	Natural convection	20°C/watt	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Relative humidity		5% to 95% RH	
EMC CHARACTERISTICS			
EMI	EN55022		Class A
ESD	EN61000-4-2	Air	± 8KV
		Contact	± 6KV
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 7)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 7)	EN61000-4-5	± 1KV	Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A






Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
FKC05-12S33	9 ~ 18 VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA	382mA	76	2200μF
FKC05-12S05	9 ~ 18 VDC	5 VDC	0mA	1000mA	50mVp-p	10mA	563mA	78	1000μF
FKC05-12S12	9 ~ 18 VDC	12 VDC	0mA	470mA	50mVp-p	10mA	603mA	82	220μF
FKC05-12S15	9 ~ 18 VDC	15 VDC	0mA	400mA	50mVp-p	10mA	649mA	81	150μF
FKC05-12D05	9 ~ 18 VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA	563mA	78	± 680μF
FKC05-12D12	9 ~ 18 VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA	597mA	81	± 100μF
FKC05-12D15	9 ~ 18 VDC	± 15 VDC	0mA	± 190mA	50mVp-p	15mA	594mA	84	± 68μF
FKC05-24S33 (W)	18 ~ 36 (9 ~ 36) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	194mA (191mA)	75 (76)	2200μF
FKC05-24S05 (W)	18 ~ 36 (9 ~ 36) VDC	5 VDC	0mA	1000mA	50mVp-p	15mA(10mA)	285mA (278mA)	77 (79)	1000μF
FKC05-24S12 (W)	18 ~ 36 (9 ~ 36) VDC	12 VDC	0mA	470mA	50mVp-p	15mA(5mA)	305mA (305mA)	81 (81)	220μF
FKC05-24S15 (W)	18 ~ 36 (9 ~ 36) VDC	15 VDC	0mA	400mA	50mVp-p	15mA(10mA)	325mA (312mA)	81 (84)	150μF
FKC05-24D05 (W)	18 ~ 36 (9 ~ 36) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA(10mA)	274mA (282mA)	80 (78)	± 680μF
FKC05-24D12 (W)	18 ~ 36 (9 ~ 36) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA(10mA)	288mA (295mA)	84 (82)	± 100μF
FKC05-24D15 (W)	18 ~ 36 (9 ~ 36) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	20mA(10mA)	308mA (297mA)	81 (84)	± 68μF
FKC05-48S33 (W)	36 ~ 75 (18 ~ 75) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	98mA (100mA)	74 (73)	2200μF
FKC05-48S05 (W)	36 ~ 75 (18 ~ 75) VDC	5 VDC	0mA	1000mA	50mVp-p	10mA(10mA)	143mA (138mA)	77 (79)	1000μF
FKC05-48S12 (W)	36 ~ 75 (18 ~ 75) VDC	12 VDC	0mA	470mA	50mVp-p	10mA(10mA)	151mA (155mA)	82 (80)	220μF
FKC05-48S15 (W)	36 ~ 75 (18 ~ 75) VDC	15 VDC	0mA	400mA	50mVp-p	10mA(10mA)	162mA (160mA)	81 (82)	150μF
FKC05-48D05 (W)	36 ~ 75 (18 ~ 75) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	10mA(10mA)	141mA (145mA)	78 (76)	± 680μF
FKC05-48D12 (W)	36 ~ 75 (18 ~ 75) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	5mA(10mA)	147mA (151mA)	82 (80)	± 100μF
FKC05-48D15 (W)	36 ~ 75 (18 ~ 75) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	10mA(10mA)	150mA (156mA)	83 (80)	± 68μF

Note



1. BELLCORE TR-NWT-000332. Case 1 : 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input and full load of standard type.
3. Typical value at nominal input and no load.
4. Typical value at nominal input and full load.
5. Test by minimum input and constant resistive load.
6. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
7. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF/100V, ESR 48mΩ
8. There is no pin at PIN10 & PIN15 for FKC05-W series.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

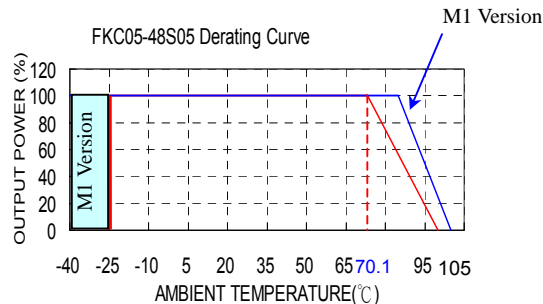

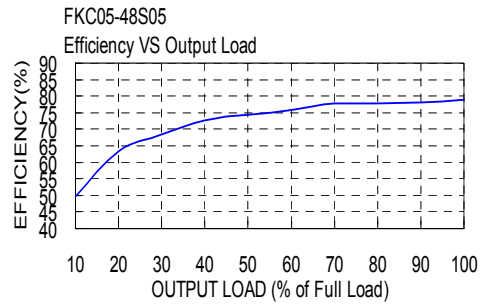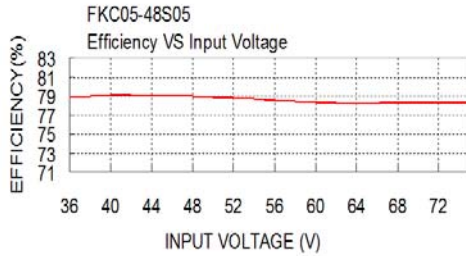

Mechanical Drawing:

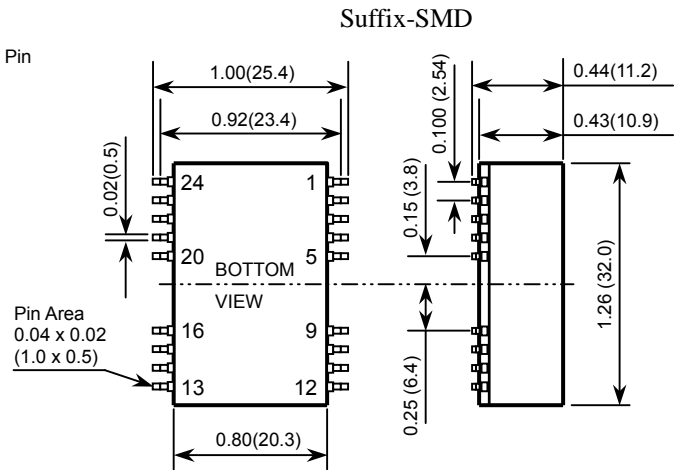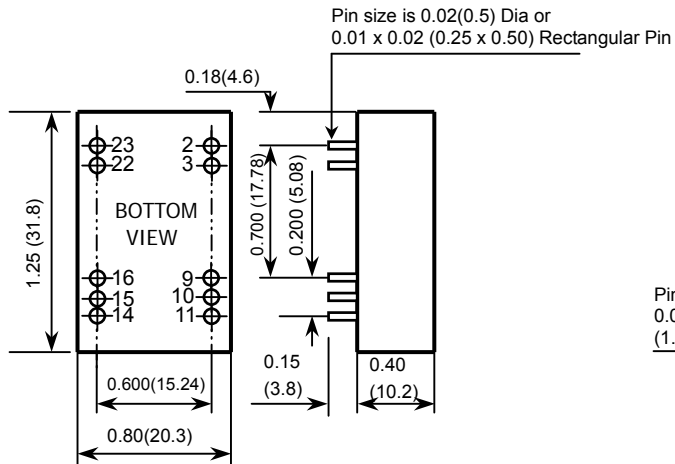

- All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)

DIP PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC(Note 8)	NC(Note 8)	15	NC(Note 8)	NC(Note 8)
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT

SMD PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC	NC	15	NC	NC
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT
Others	NC	NC	Others	NC	NC

